


# G-FORCE




- \* TUBE Amplifier
- \* TUBE Bass-EQ
- \* TUBE Mixer
- \* Discrete VCAs
- \* Feedback-Overdrive Loop

- with Expander*
- \* Line-Level-Input
  - \* Saturation-Input
  - \* Additional Input

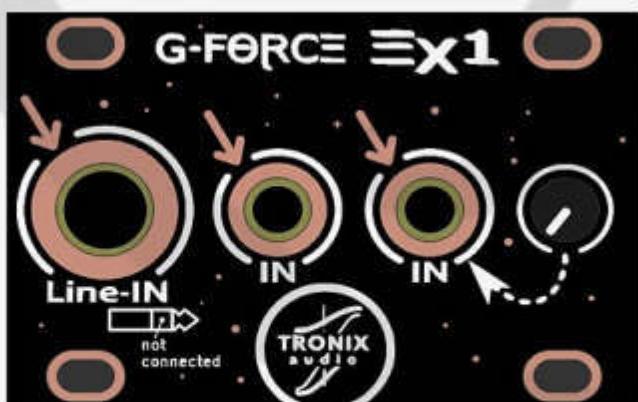

*makes your music  
LIVING*


100% analog

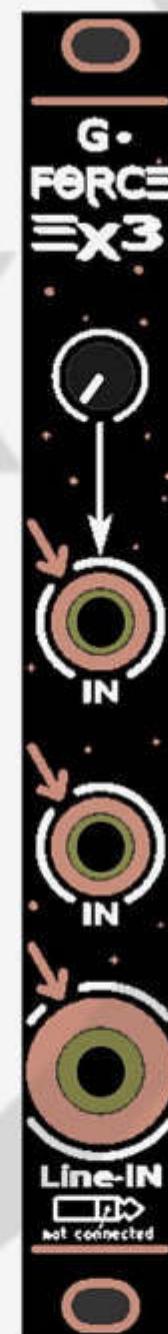

# G-FORCE



## Controls of the module

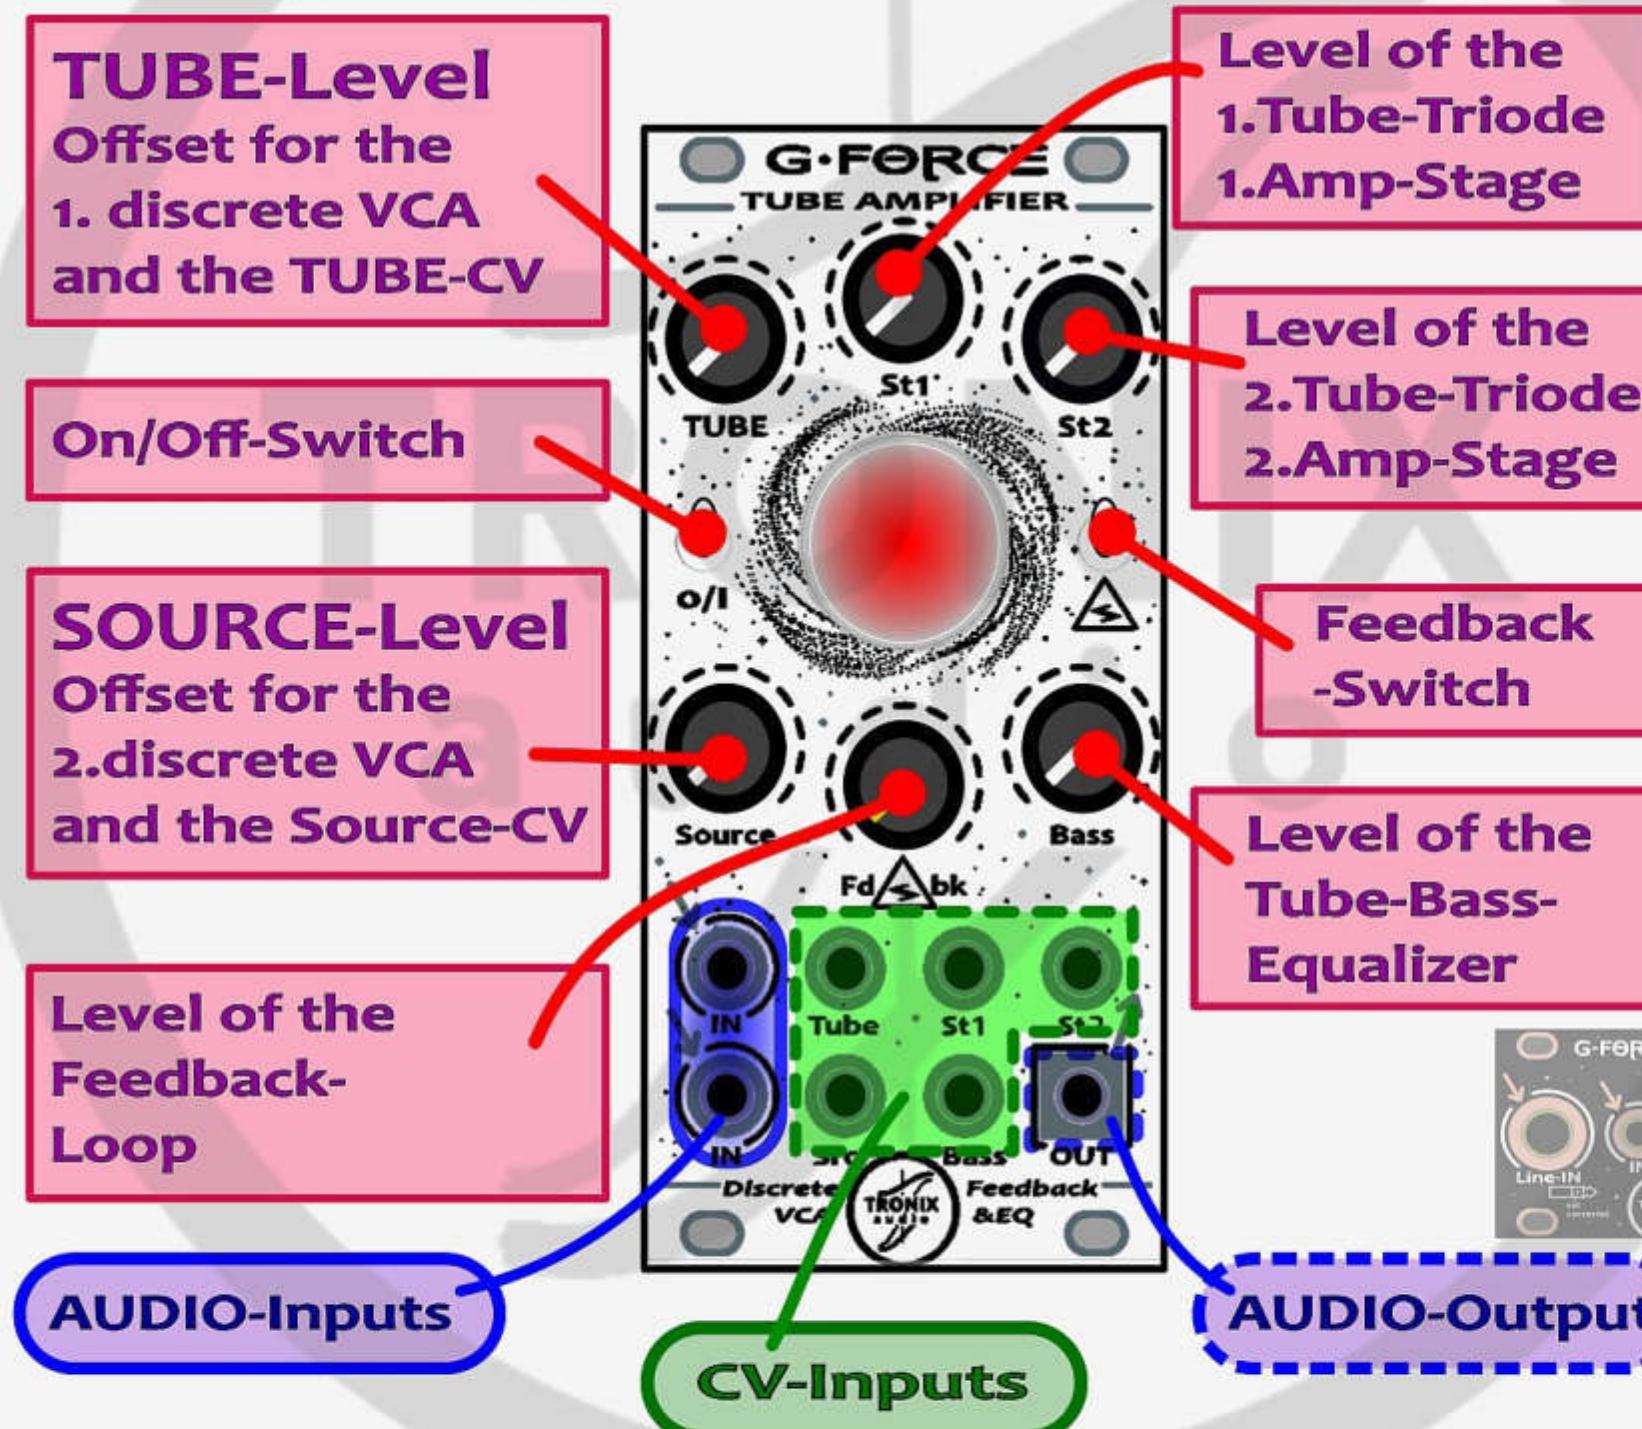

# G-FORCE

## the 3 signal ways



TUBE Way

SOURCE Way

Feedback Way




# G-FORCE

## the Bass-EQ



GForce has an active ( BJT-IC regulated ) Equalizer with a nonlinear shelf-characteristic for the Bass-frequencies in the tube way.

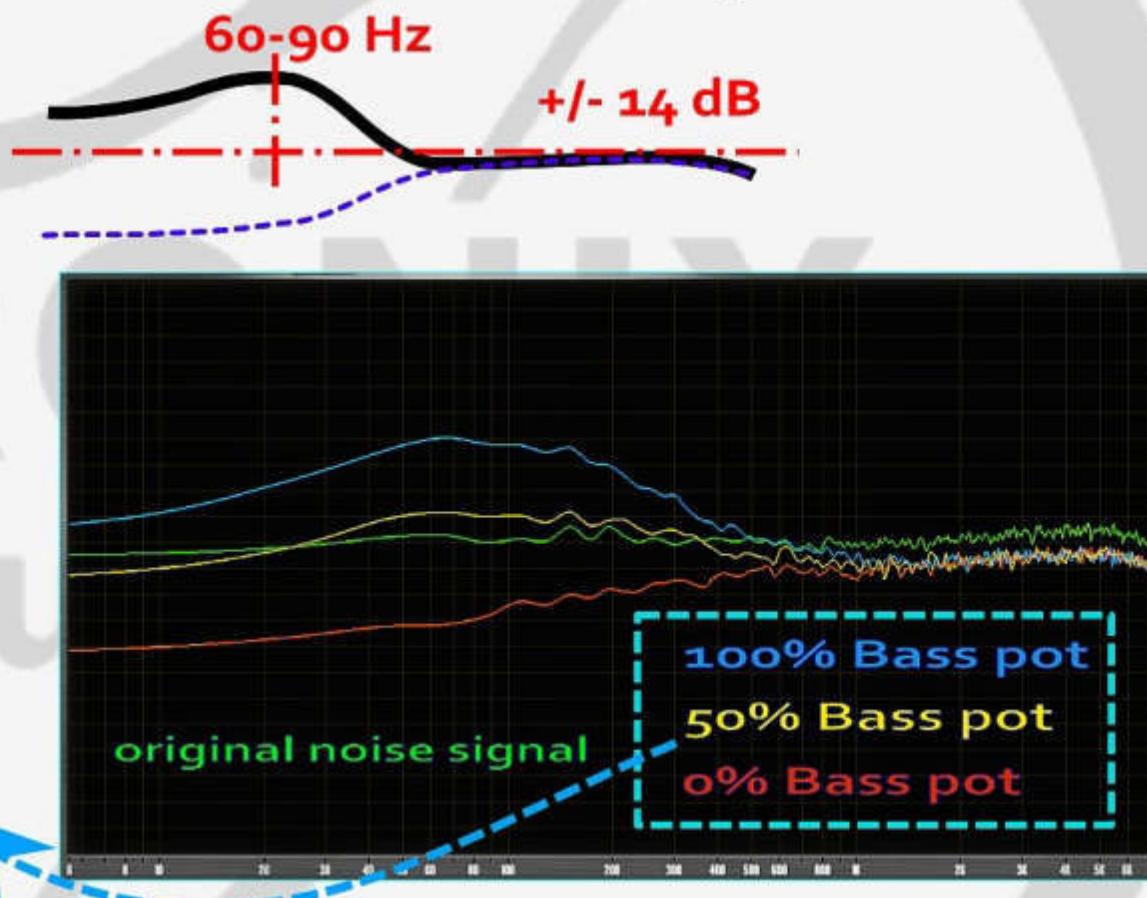

**! Note positions of "Stage"-pots !**

The "Bass"-CV-Input accepts positive and negative voltages.  
The regulation is similar to the CV-control of the VCAs.

# G-FORCE



## the Tube-Amplifier

Tronix-Audio "GForce" brings you powerful tube sound into your modular system. GForce uses a **ECC83S** Dual-Triode tube. Each triode has its own amplifier stage and character. In combination with the Bass-EQ and the Feedback the sound ranges from warm to harsh and distorted.



GForce can be used with following tubes :  
**ECC83, 12AX7, 7025, ECC803, 6057, 5751, 6L13, B339, CV492, M8137, CV4004** ! More tube types could work, for more info you can write us an EMail !  
Manufacturer-related sound differences are possible !

The "Stage"-CV-Inputs accepts positive and negative voltages.

if the potentiometer is fully closed, the gain is leveled up only by positive voltages.

if the potentiometer is fully open, the gain is leveled down only by negative voltages.

if the potentiometer is centered, the gain is leveled up or down by corresponding voltages.


# G-FORCE

## as a TUBE-Compressor



With the right settings, GForce can sound like much more expensive studio compressors. The sounds are clearer and more present, all without being overpowering. The following setting is suitable for this.

If you increase the source portion with the pot, this is similar to a parallel compression.

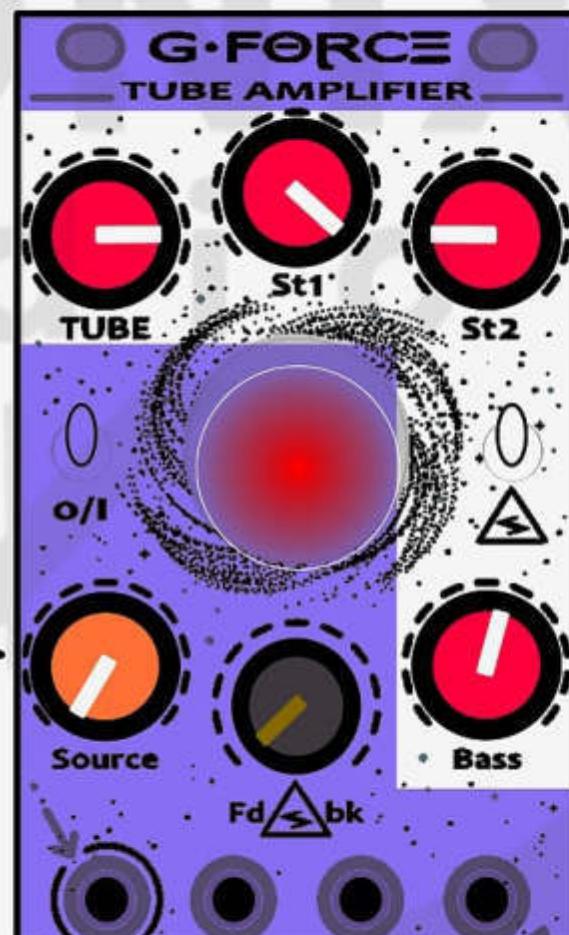


# G-FORCE

## the Feedback



GForce has a classic feedback path, with attenuator and switch. Because feedbacks usually start very abruptly, we have omitted a CV input for it. The feedback can boost the generated audio material enormously and reaches up to self-oscillation.

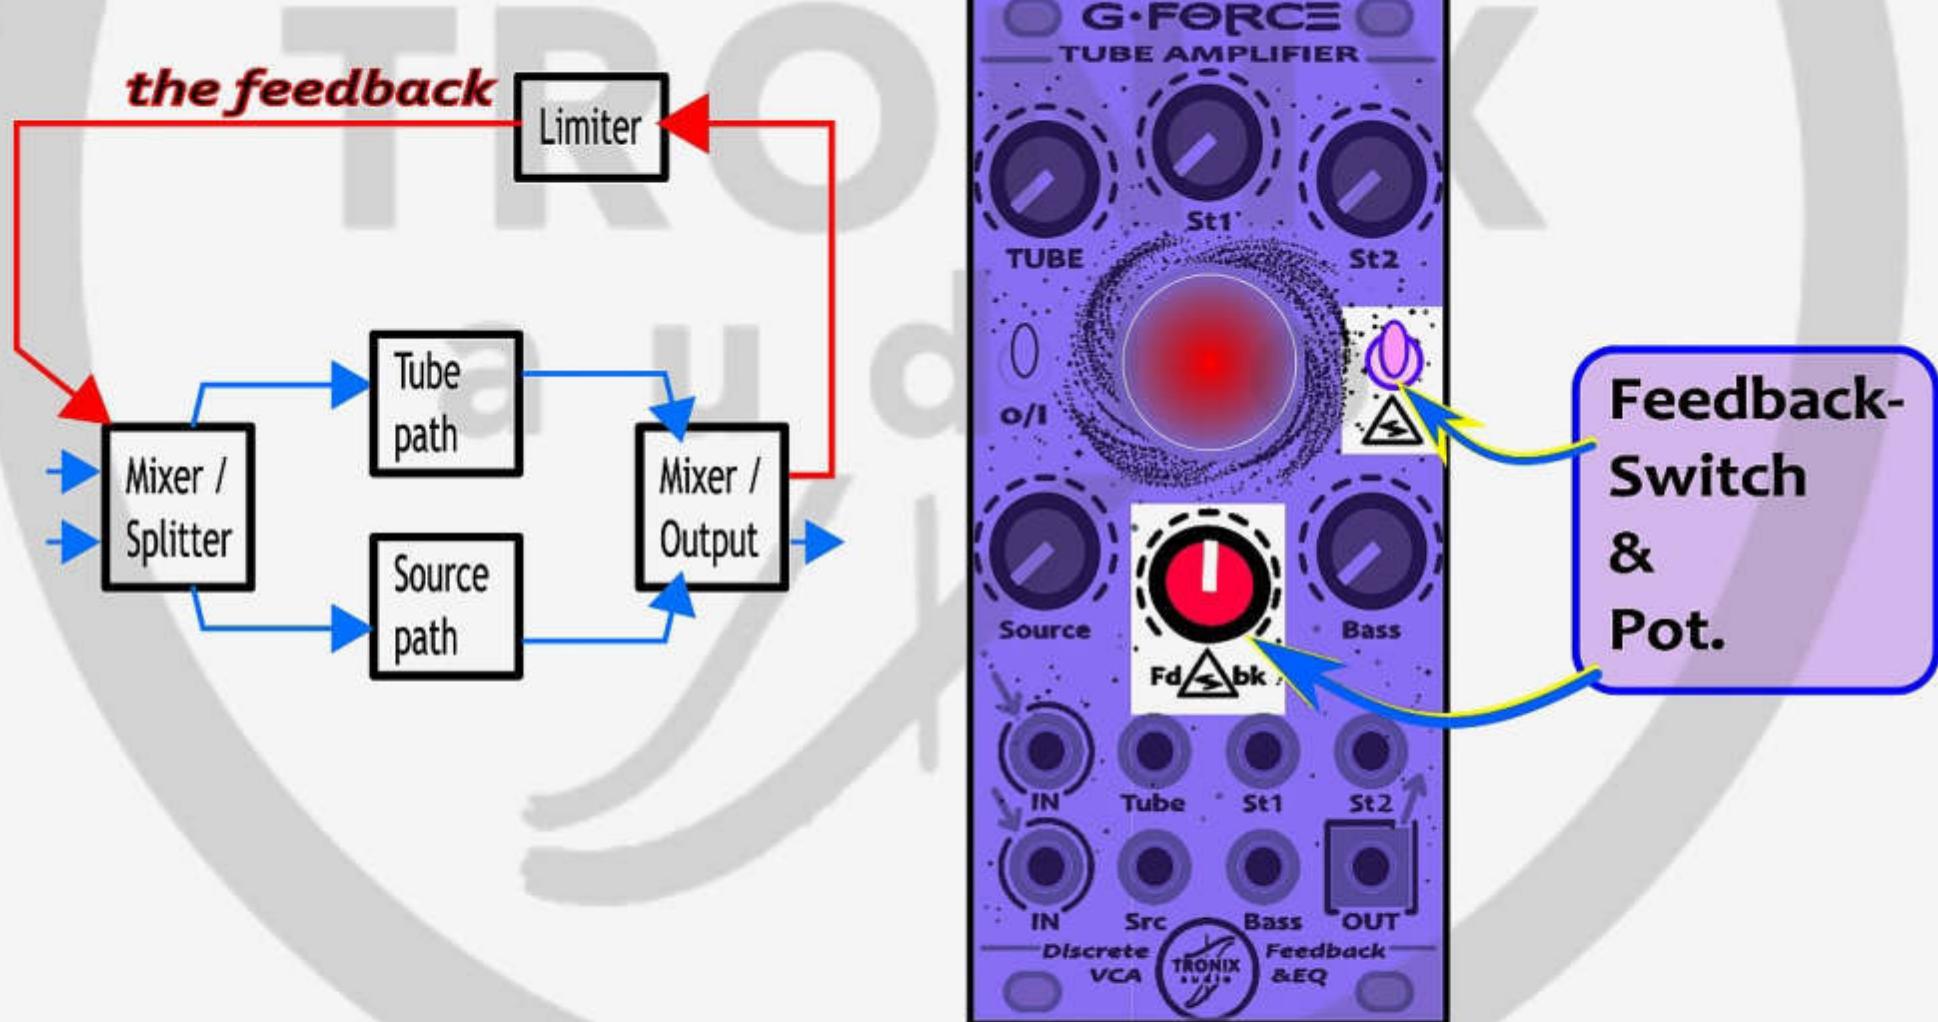

# G-FORCE



## the 1. discrete VCA

GForce has 2 discrete VCA control units. The **1st** one is for the level of the complete tube path. Discrete means that the circuit is built exclusively with BJT-transistors or BJT-based ICs. The result is a unique reproduction of the audio material.



The "Tube"-CV-Input accepts positive and negative voltages.



if the potentiometer is fully closed,  
the VCA is opened only by  
positive voltages. ( Standard VCA )



if the potentiometer is fully open,  
the VCA is closed only by  
negative voltages. ( used for Side-  
chaining, Ducking and Limiting )



if the potentiometer is centered,  
the VCA is opened or closed by  
corresponding voltages. ( used for  
Sidechaining, Ducking, Limiting  
and to give accents )

# G-FORCE



## the 2. discrete VCA

GForce has 2 discrete VCA control units. The **2nd** one is for the level of the source-/ input-material. Discrete means that the circuit is built exclusively with BJT-transistors or BJT-based ICs. The result is a unique reproduction of the audio material.



The "Source"-CV-Input accepts positive and negative voltages.



if the potentiometer is fully closed,  
the VCA is opened only by  
positive voltages. ( Standard VCA )



if the potentiometer is fully open,  
the VCA is closed only by  
negative voltages. ( used for Side-  
chaining, Ducking and Limiting )





if the potentiometer is centered,  
the VCA is opened or closed by  
corresponding voltages. ( used for  
Sidechaining, Ducking, Limiting  
and to give accents )

# G-FORCE

## the "tube" path



All input-signals are routed to 2 discrete paths in the module, the source path and the tube path. GForce is adding more details to the sound compared to more common transistorized designs. This tube module make your music LIVING.

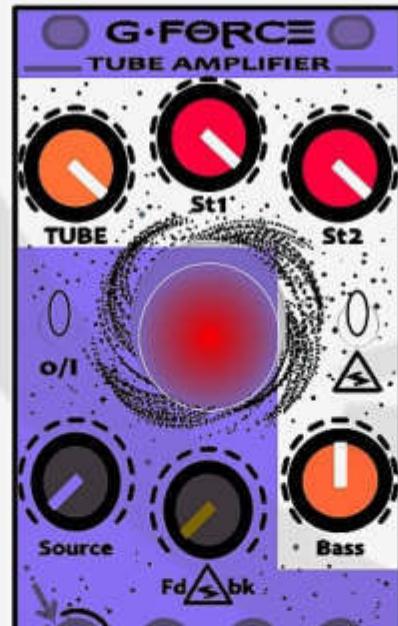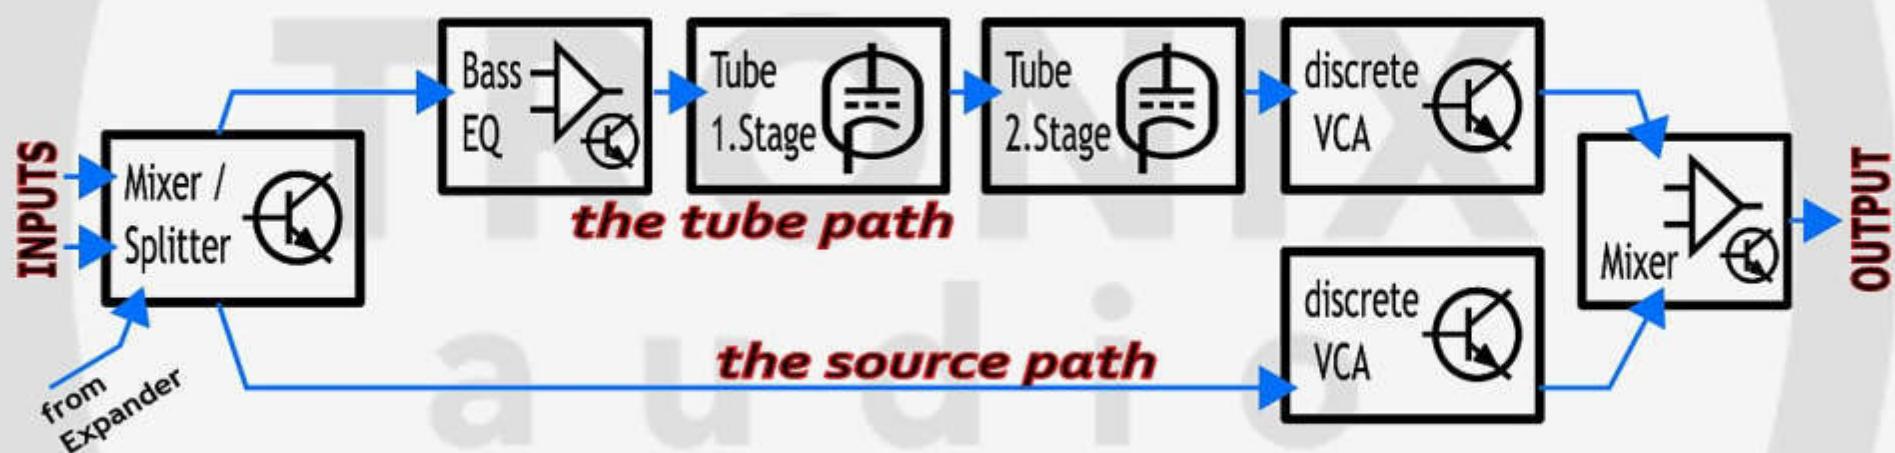


*the tube amplifier*

# G-FORCE

## the discrete "source" path



All input-signals are routed to 2 discrete paths in the module, the source path and the tube path. The source signal path reproduces the audio material very naturally, near on the original.

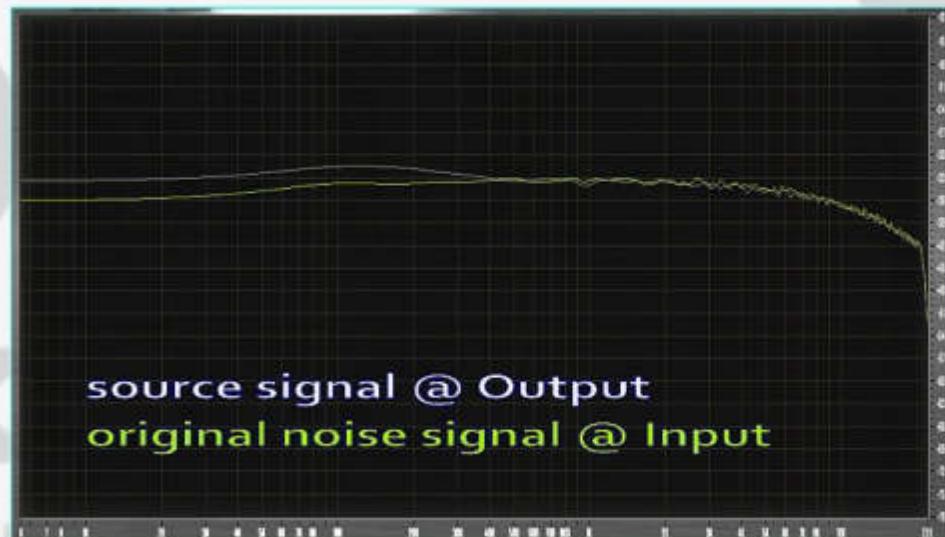


The "Bass"-Pot has an ultra minimal effect on the source path !

# G-FORCE

## the 2 Expander



2 expander modules are available for GForce. Technically, both are largely identical. They only differ in the height type.

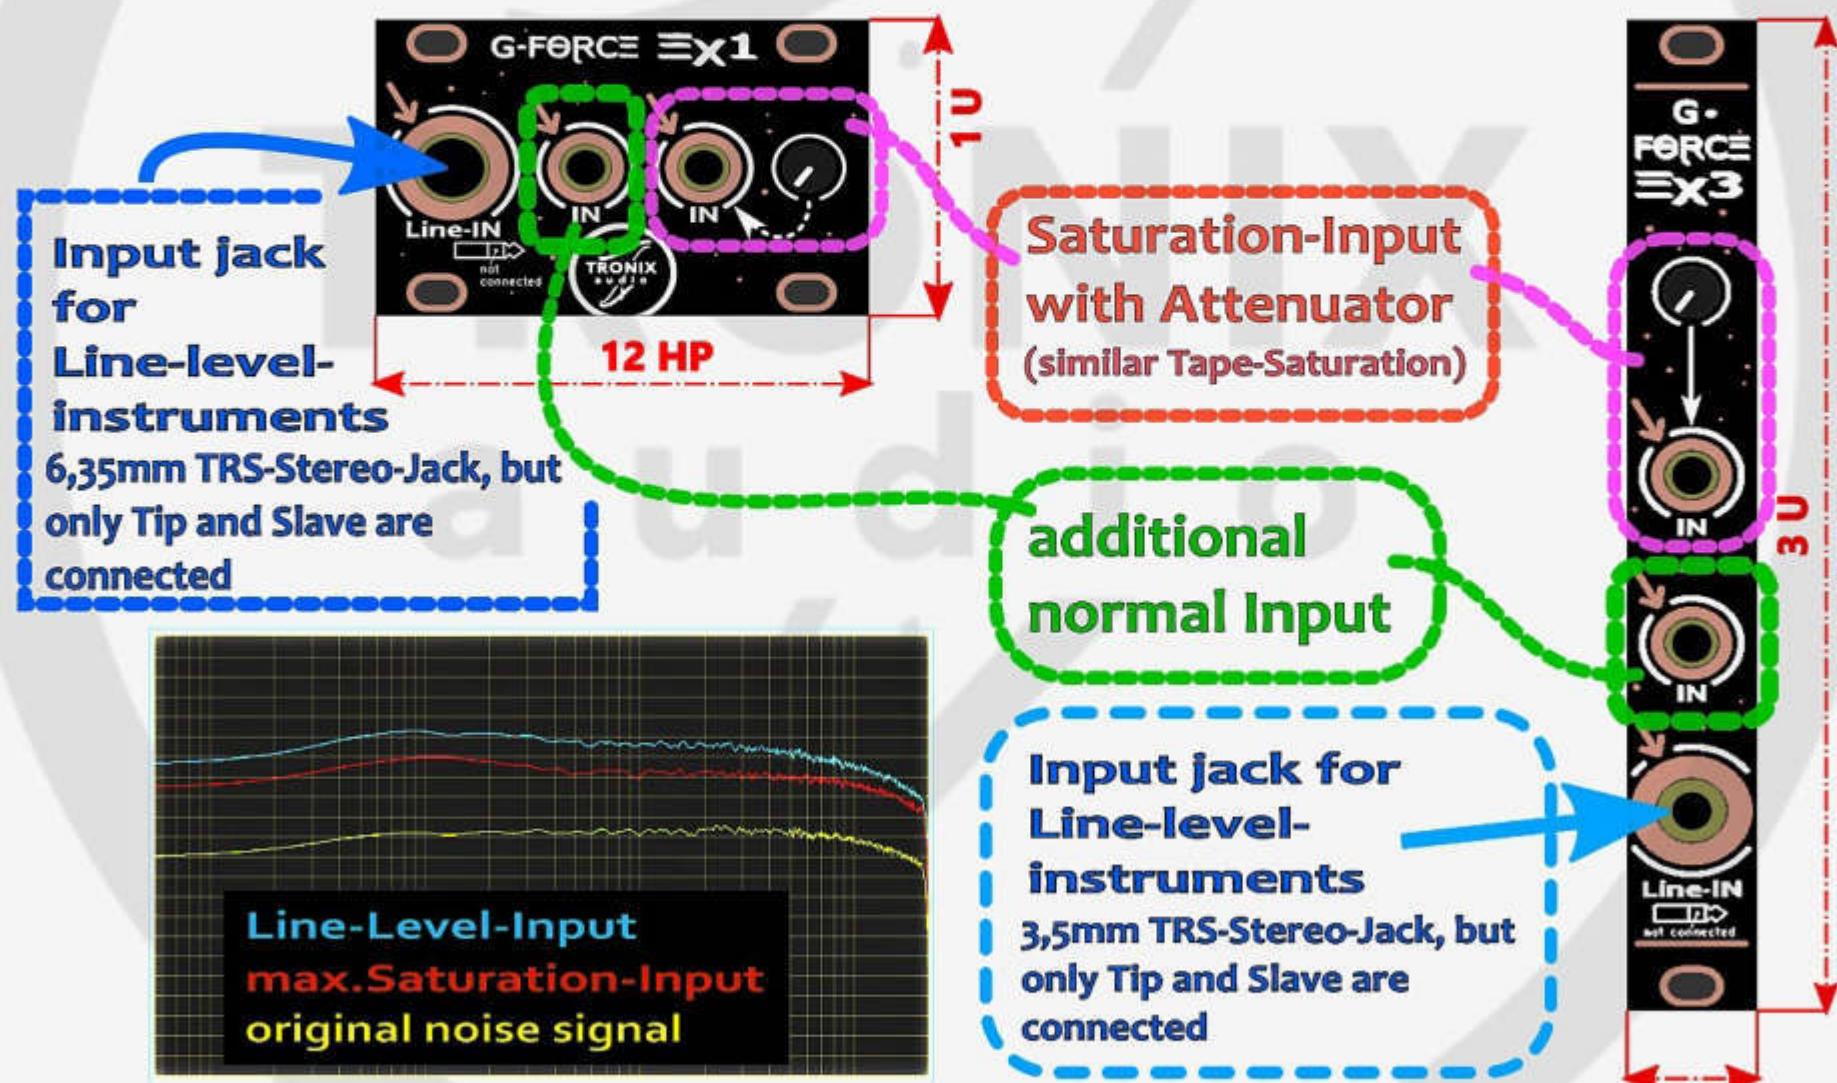

In the Line-In-TRS-Jack are only Tip and Slave connected, so you can put in a mono or a stereo cable from your Line-Level-Instrument to use it in Eurorack without any problems.

# G-FORCE

## the ON / OFF - Switch



GForce has an ON- / OFF-Switch. This switch helps significantly extend the lifetime of the tube and reduce power consumption in the case when the module is not used , or if all other modules are switched on at the same time.

**ON- / OFF-  
Switch**



## **safety instruction !**

Please follow the instructions for use as this is the only way to ensure proper operation of the "Tronix-audio" module. Water is fatal to most electronic devices unless they are waterproofed. "Tronix-audio" modules are NOT intended for use Intended for use in a humid environment. Under no circumstances must liquids or other conductive substances penetrate the module. In this case, the module must be unplugged, dried immediately and inspected and cleaned by a qualified technician. Do not expose the module to temperatures above +50°C or below -15°C. All modules may only be operated with a Eurorack-compatible internal power supply (doepfer etc.), with a maximum of +/-12 volts! **ATTENTION: DANGER TO LIFE IF NOT PERMITTED USE OF HIGHER VOLTAGES OVER 50 VOLT !!!**

This module is a musical instrument and should be treated as such. Install carefully and don't drop it. Any existing warranty does not apply to modules with visible damage. Any module shipped to us for return, exchange and/or warranty repair must be in its original packaging. All other deliveries will be refused and returned to you. Make sure you keep the original packaging and technical documentation.

If contractually agreed, items for exchange and/or warranty repairs must be sent to:

M.Jenzsch  
Karl-Marx-Platz 6  
06242 Braunsbedra OT Roßbach  
Deutschland.



Designed and made in Germany by Mario Jenzsch @ Tronix-audio.

Technical data can be changed without notice!

If you have any questions,  
please feel free to contact us by email: [tronix-audio@web.de](mailto:tronix-audio@web.de).

## **THANK YOU FOR SHOPPING !**

The modules from "Tronix-audio" are developed and manufactured in small series in Germany and undergo strict quality control. Many components are checked for tolerances before assembly and selected if necessary. The modules **always** have a mechanical and electronic reverse polarity protection of the power connection (box connector and rectifier diodes), and the inputs and outputs are protected against unwanted overvoltage (in the appropriate Eurorack range)

**NOT AGAINST HIGH VOLTAGE! ATTENTION DANGER TO LIFE WHEN USING HIGHER VOLTAGES OVER 50 VOLTS !!!**

The module : **G-FORCE**

G-Force is a fully analog discrete tube module for the Eurorack. G-Force works as a saturation module, classic voltage-controlled amplifier optimized for adjustments in the bass range, as a tube compressor and, if necessary, as a distortion unit. G-Force uses a dual triode vacuum tube and 2 discrete (transistor) VCA circuits as active elements.

Depending on all control parameters, G-Force can add more warmth and volume to the sound. There will be 2 optional passive expanders for Gforce, one for 1U height and one for 3U height. With the help of the expanders you get 3 additional inputs: a normal input, a saturation input with additional slight amplification and a line-level input for external synthesizers, studio or hi-fi devices and the like.

As is usual with tube units, tonal qualities and subtleties vary slightly between units. This is normal and emphasizes the uniqueness of each module.

G-Force can be used with the following tubes: ECC83 (Original ECC83S), 12AX7, 7025, ECC803, 6057, 5751, 6L13, B339, CV492, M8137, CV4004 ! **More tube types can also work, just write us an email !**

## TECHNICAL SPECIFICATIONS:

power consumption..... +12Volt 175mA, -12Volt 18mA

**Max** Switch-on peak approx. 0.5 sec..... +12Volt 350mA,

module width ..... 12 HP / 56mm

module depth ..... 39mm

Reverse Power Protection / Eurorack synth compatible

## Sicherheitsanweisung !

Bitte befolgen Sie die Gebrauchsanweisung, denn nur dadurch wird ein ordnungsgemäßer Betrieb des "Tronix-audio-Modul" sichergestellt. Wasser ist für die meisten elektronischen Geräte tödlich, es sei denn sie sind wasserdicht gemacht. Die Module von "Tronix-audio" sind NICHT zur Verwendung in feuchter Umgebung vorgesehen. Es dürfen keinesfalls Flüssigkeiten oder andere leitende Substanzen in das Modul eindringen. In diesem Fall muß das Modul vom Stromnetz getrennt werden, sofort getrocknet und von einem qualifizierten Techniker untersucht und gereinigt werden. Setzen Sie das Modul keinen Temperaturen über + 50 ° C oder unter -15 ° C aus. Alle Module dürfen nur mit einer Eurorack-kompatiblen internen Stromversorgung ( doepfer etc. ) betrieben werden, maximal mit +/-12Volt ! **ACHTUNG: LEBENSGEFAHR BEI NICHTZULÄSSIGER VERWENDUNG VON HÖHEREN SPANNUNGEN ÜBER 50 VOLT !!!**

Dieses Modul ist ein Musik- Instrument, und als solches sollte es auch behandelt werden. Installieren Sie es vorsichtig, und lassen Sie es keinesfalls fallen. Eine eventuell vorhandene Garantie gilt nicht für Module mit sichtbaren Schäden. Jedes Modul, das an uns geliefert wird für Rückgabe, Umtausch und / oder Garantiereparatur muss in der Originalverpackung sein. Alle anderen Lieferungen werden abgelehnt und an Sie zurückgesandt. Stellen Sie sicher, dass Sie die Originalverpackung und technischen Dokumentationen aufbewahren.

Sofern dies vertraglich vereinbart war müssen Artikel für Umtausch und / oder Garantie-Reparaturen gesendet werden an:

M.Jenzsch  
Karl-Marx-Platz 6  
06242 Braunsbedra OT Roßbach  
Deutschland.



Entworfen und hergestellt in Deutschland von Mario Jenzsch @ Tronix-audio.

Technische Daten können ohne Ankündigung geändert werden !  
Bei Fragen können Sie sich gerne an uns wenden, per E-Mail: [tronix-audio@web.de](mailto:tronix-audio@web.de).

## DANKE FÜR IHREN EINKAUF !

Die Module von „Tronix-audio“ werden in Kleinserie in Deutschland entwickelt, gefertigt und durchlaufen eine strenge Qualitätskontrolle. Viele Bauteile werden vor der Montage auf Toleranzen überprüft und gegebenenfalls selektiert.

Die Module besitzen **immer** einen mechanischen und elektronischen Verpolsschutz des Stromanschlusses ( Wappenstecker und Gleichrichter-Dioden), und die Ein- und Ausgänge sind geschützt gegen unerwünschte Überspannung (im angemessenen Eurorack-bereich) **NICHT GEGEN HOCHSPANNUNG ! ACHTUNG LEBENSGEFAHR BEI VERWENDUNG VON HÖHEREN SPANNUNGEN ÜBER 50 VOLT !!!**

### Das Modul : **G-FORCE**

G-Force ist ein vollanaloges diskretes Röhren-Modul für das Eurorack. G-Force arbeitet als Sättigungsmodul, klassischer spannungsgesteuerter Verstärker optimiert für Anpassungen im Bass-Bereich, als Röhren-Compressor und bei Bedarf als Verzerrer-Einheit.

G-Force verwendet eine Dual-Trioden-Vakuumröhre und 2 diskrete (Transistor) VCA-Schaltungen als aktive Elemente. In Abhängigkeit von allen Steuerparametern kann G-Force dem Sound mehr Wärme und Volumen hinzufügen.

Für Gforce wird es 2 optionale passive Expander geben, einer für 1U-Bauhöhe , und einer für 3U-Bauhöhe. Mit Hilfe der Expander bekommt ihr 3 zusätzliche Eingänge: einen normalen Eingang, einen Sättigungseingang mit zusätzlicher leichter Verstärkung und einen Line-Level-Eingang für externe Synthesizer , Studio- oder Hifi-Geräte und ähnliches.

Wie es bei Röhrengeräten üblich ist, variieren die Klangqualitäten und Feinheiten zwischen den Geräten leicht. Dies ist normal und unterstreicht die Einzigartigkeit jedes Moduls.

G-Force kann genutzt werden mit folgenden Röhren: ECC83 ( Original ECC83S ) , 12AX7 , 7025 , ECC803 , 6057 , 5751 , 6L13 , B339 , CV492 , M8137 , CV4004 ! **Mehr Röhrentypen können auch funktionieren , schreibe uns dazu einfach eine Email !**

### TECHNISCHE DATEN:

Stromverbrauch im Betrieb ..... +12Volt 175mA, -12Volt 18mA

**Max.** Stromverbrauch ..... +12Volt 350mA, ( **Einschaltpeak** ca. 0,5 sek. )

Modulbreite ..... 12 HP / 56mm

Modultiefe ..... 39mm

Reverse Power Protection / Eurorack synth compatible

## **General terms and conditions of business**

We, "Tronix-Audio", manufacture our products according to the ROHS guidelines! Each of our products is quality-tested in-house for function and safety, and then packaged, sold and shipped in a functional manner. We guarantee that all shipping actions will run smoothly!

We, "Tronix-Audio", guarantee that your newly purchased product of our brand will function correctly!

There is currently no FCC certification (approval of devices with radio technologies in the USA)! ( June 2023)

Attention: Buyers / users in the USA and Canada accept our manufacturing guidelines for ROHS conformity when purchasing and using our products, and waive the right to file a lawsuit against us for FCC certification!

## **Warranty conditions**

Tronix Audio warrants this product to be free from defects in material or workmanship and to conform to the specifications at the time of shipment for a period of one year from the date of purchase. During this time, any defective unit will be repaired, serviced and calibrated on a return-to-ship basis to our headquarters in Germany, with the customer paying the shipping cost to Tronix-Audio. This warranty does not cover problems resulting from shipping damage, improper installation or power supply, improper working environment, abuse, or other obvious faults caused by the user.

Tronix Audio cannot be held responsible for any damage incurred during transit. If you are returning goods, please retain your postage receipt from your sender. Without this information, we cannot assume any liability for shipments that do not reach us. Before you send us anything, please contact us by email at: tronix-audio@web.de

## **LEGACY support**

If something went wrong with a "Tronix Audio" product after the warranty period has expired, there is no need to worry - we are still happy to help! This applies to each of our devices, regardless of when it was originally purchased. In certain cases, however, we reserve the right to charge for labour, parts and transport costs, if applicable.

## **Disclaimers :**

We, "Tronix-Audio", assume no liability and claims for damages from third-party providers, second-hand sellers, or generally used devices of our "Tronix-Audio" brand!

We, "Tronix-Audio", do not assume any liability for damage or injuries caused by improper handling of our products!

We, "Tronix-Audio", assume no liability for damage or injury caused by improper handling of our products!

We, "Tronix-Audio" manufacture music devices and these should be treated and used as such, any other use is unacceptable and not our responsibility!

"Please read the instructions for use. Liability for damage resulting from improper, knowing or unknowing use is excluded."

Anyone who carries out a self-endangering or self-damaging action through incorrect handling of our product and with knowledge or negligent ignorance of the risk is responsible for the consequences!

## **Dangerous components and special safety measures:**

Some of the components listed below may represent a hazard and require particular care and attention! :

- Vacuum electron tubes, these heat up and there is a risk of burns. Therefore, be careful not to touch them during operation! Before replacing the vacuum electron tube, please wait 2 minutes until the vacuum electron tube has cooled down to below 37° Celsius!

- Vacuum electron tubes have a glass housing body and there is a risk of cut injuries if the glass housing body is defective. Therefore, only touch a vacuum electron tube with a defective glass body with suitable protective clothing (cut-resistant gloves, protective goggles) and suitable tools (insulated pliers according to the VDE standard)!

## **Allgemeine Geschäftsbedingungen**

Wir, "Tronix-Audio", fertigen unsere Produkte nach den ROHS-Richtlinien konform ! Jedes unserer Produkte wird firmenintern auf Funktion und Sicherheit qualitätsgeprüft, und anschließend funktionstüchtig verpackt , verkauft , versendet. Wir garantieren für einen reibungslosen Ablauf aller Versandaktionen!

Wir, "Tronix-Audio", garantieren Ihnen eine fehlerfreie Funktion ihres neu erworbenen Produkts unserer Marke !

Eine FCC-Zertifizierung ( Zulassung von Geräten mit Funktechnologien in den USA ) besteht aktuell nicht ! ( Stand Juni 2023 )

Achtung: Käufer / Nutzer in den USA und Kanada akzeptieren beim Kauf und der Nutzung unserer Produkte unsere Herstellungs-Richtlinien nach ROHS-Konformität, und verzichten auf das Recht nach FCC-Zertifizierung zu klagen !

## **Garantiebedingungen**

Tronix-Audio garantiert für einen Zeitraum von einem Jahr ab Kaufdatum, dass dieses Produkt frei von Material- oder Verarbeitungsfehlern ist und den Spezifikationen zum Zeitpunkt des Versands entspricht. Während dieser Zeit wird jedes defekte Gerät repariert, gewartet und kalibriert auf Basis der Rücksendung zu unserem Firmensitz in Deutschland, wobei der Kunde die Transportkosten an Tronix-Audio zahlt. Diese Garantie deckt keine Probleme ab, die auf Transportschäden, falsche Installation oder Stromversorgung, unsachgemäße Arbeitsumgebung, missbräuchliche Behandlung oder andere offensichtliche, vom Benutzer verursachte Fehler zurückzuführen sind.

Tronix-Audio kann keine Verantwortung übernehmen für Schäden, die während des Transports entstanden sind. Wenn Sie Waren zurücksenden, bewahren Sie bitte den Versandbeleg Ihres Versenders auf. Ohne diese Angabe können wir keine Haftung für Sendungen übernehmen, die uns nicht erreichen. Bevor Sie uns etwas senden, kontaktieren Sie uns per EMail an: tronix-audio@web.de

## **LEGACY-Unterstützung**

Wenn mit einem "Tronix-Audio"-Produkt nach Ablauf der Garantiezeit etwas schief gelaufen ist, besteht kein Grund zur Sorge – wir helfen Ihnen weiterhin gerne weiter! Dies gilt für jedes unserer Geräte, unabhängig davon, wann es ursprünglich erworben wurde. In bestimmten Fällen behalten wir uns jedoch das Recht vor, ggf. Arbeits-, Ersatzteil- und Transportkosten in Rechnung zu stellen.

## **Haftungsausschlüsse :**

Wir, "Tronix-Audio", übernehmen keinerlei Haftung und Schadensersatzansprüche von Drittanbietern, Second Hand Verkäufern, oder allgemein gebrauchten Geräten unserer Marke "Tronix-Audio" !

Wir, "Tronix-Audio", übernehmen auch keinerlei Haftung für Schäden oder Verletzungen durch einen falschen unzweckmäßigem Umgang mit unseren Produkten !

Wir, "Tronix-Audio", fertigen Musikgeräte , und als solche sollten sie behandelt und benutzt werden, jegliche andere Nutzung ist unzweckmäßig !

„Bitte Gebrauchsanleitung beachten. Die Haftung für Schäden aus nicht ordnungsgemäßem wissentlichem oder unwissentlichem Gebrauch wird ausgeschlossen.“

Derjenige, der eine selbstgefährdende oder selbstschädigende Handlung durch den fehlerhaften Umgang mit unserem Produkt selbst und in Kenntnis bzw. fahrlässiger Unkenntnis des Risikos vornimmt, ist für deren Folgen selbstverantwortlich !

## **Gefährliche Bauteile und Besondere Sicherheitsmaßnahmen :**

Einige nachfolgend genannte Bauteile stellen unter Umständen eine Gefahr dar und bedürfen besonderer Vorsicht und Achtsamkeit ! :

- Vakuum-Elektronen-Röhren , diese erhitzten sich und es besteht die Gefahr von Verbrennungen . Achten Sie daher darauf diese nicht im Betrieb anzufassen ! Vor dem Austausch der Vakuum-Elektronen-Röhre warten Sie bitte 2 Minuten bis die Vakuum-Elektronen-Röhre sich auf unter 37°Celsius abgekühlt hat !

- Vakuum-Elektronen-Röhren haben einen Gehäusekörper aus Glas und es besteht die Gefahr von Schnittverletzungen wenn der Glas-Gehäusekörper defekt ist. Fassen Sie deshalb eine Vakuum-Elektronen-Röhre mit defektem Glaskörper nur mit geeigneter Schutzkleidung ( schnittfeste Handschuhe , Schutzbrille ) und geeignetem Werkzeug ( isolierte Zange nach VDE-Norm ) an !